




Tri-Glide Buckle

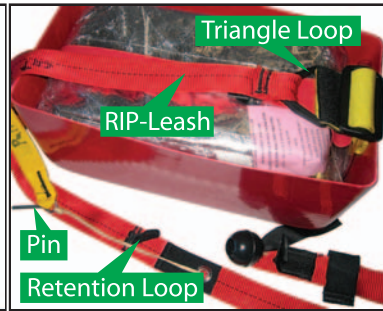

Triangle Loop

RIP-Leash

Pin

Retention Loop



RIP-Leash



Cord



2

### Attaching the Fire Shelter to the RIP-Leash

1. discard protective plastic box that came with your fire shelter
2. put the 2" plastic Tri-glide Buckle onto the shelter yellow or orange handle

3. pull strap through plastic Triangle Loop and weave back through Tri-Glide buckle
4. place fire shelter in the provided protective box with RIP-Leash and Retention Loop facing up.

2. loosen Tension Straps



5. run supplied 18" cord through RIP-Leash retention loop and feed both ends through the inside of grommet #1


6. continue running cord through the numbered grommets, being sure to feed from the inside (numbered side) out

### Loading the RIP-Pack

1. pull retention Pin towards protective box removing slack from Release Knob

3. place pack down so numbers on inside top flaps are readable; insert fire shelter box
4. place RIP-Leash between flaps #1 and #3

Pull tape for emergency shelter release; open flaps to expose

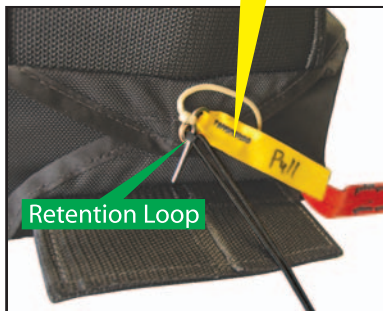


Retention Loop



Thin Tape

CAM Buckle

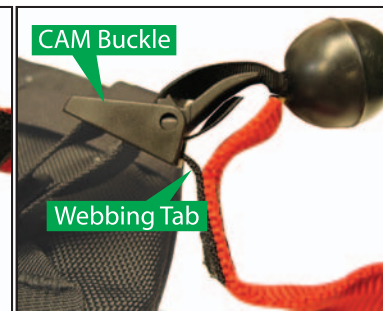

CAM Buckle

Webbing Tab



7. pull through and tighten until the Retention Loop is exposed through all grommets
8. insert pin and remove cord

10. apply RIP-Leash Velcro to Mated Surface on pack
11. tighten Tension Straps; put cord back into pocket

12. attach end of RIP Leash to 1" CAM buckle by inserting Thin Tape on Release Knob backwards through the CAM Buckle

13. insert the 1" Webbing Tab through bottom of CAM Buckle; and close buckle

14. cover the buckle assembly with elastic loop (this keeps it from accidentally opening)

9. tuck bottom flap into top flap, closing abrasion cover

